

PNY®

Professional Solution Provider

BEYOND FAST

GEFORCE RTX 40 SERIES



EDITOR'S CHOICE
TECHPOWERUP

NVIDIA GEFORCE RTX



VELOCITYX
Overclocking Software



RTX 4090
ARGB OC / ARGB



RTX 4090
LED



RTX 4080
ARGB OC / ARGB



RTX 4080
LED



RTX 4070 TI
ARGB OC / ARGB



RTX 4070 TI
LED

NVIDIA® CUDA Cores	16384	16384	9728	9728	7680	7680
Clock Speed	2565 MHz/ 2520 MHz	2520 MHz	2550 MHz/ 2505 MHz	2505 MHz	2670 MHz/ 2610 MHz	2610 MHz
Memory Size	GDDR6X 24GB	GDDR6X 24GB	GDDR6X 16GB	GDDR6X 16GB	GDDR6X 12GB	GDDR6X 16GB
Memory Interface	384-bit	384-bit	256-bit	256-bit	192-bit	192-bit
TDP (W)	450 W	450 W	320 W	320 W	285 W	285 W

Ultimate Play

GEFORCE RTX 30 SERIES



NVIDIA GEFORCE RTX



RTX 3070 TI



RTX 3070



RTX 3060 TI



RTX 3060



RTX 3050

NVIDIA® CUDA Cores	6144	5888	4864	3584	2560
Clock Speed	1770 MHz	1725 MHz	1665 MHz	1777 MHz	1777 MHz
Memory Size	GDDR6X 8GB	GDDR6 8GB	GDDR6 8GB	GDDR6 12GB	GDDR6 8GB
Memory Interface	256-bit	256-bit	256-bit	192-bit	128-bit
TDP (W)	290 W	220 W	200 W	170 W	130 W

**GAMER,
MODDER,
STREAMER**

CREATOR

**TECH
POWER
USER**

**TECH
SAVVY**



PNY®

REDEFINE POSSIBILITIES

PC Memory



SO-DIMM

U-DIMM

XLR8 RGB

XLR8 DDR5
MAKO / MAKO RGB


Memory Type	DDR4	DDR4	DDR4 RGB	DDR5
Frequency Speed	2666/3200 MHz	2666/3200 MHz	3200/ 3600 MHz	5600/6000/ 6400 MHz
Capacity	8GB, 16GB, 2x 8GB, 2x 16GB	16GB, 8GB, 2x16GB, 2x8GB	16GB, 8GB, 2x16GB, 2x8GB	16GB, 2x16GB
Overclocking Support	No	Yes	XMP 2.0	XMP 3.0 AMD EXPO
Form Factor	Notebook	Desktop	Desktop	Desktop

Solid State Drives



red dot winner 2022

PNY XLR8 SSD Cover
with Integrated Heatsink Designed to fit PS5

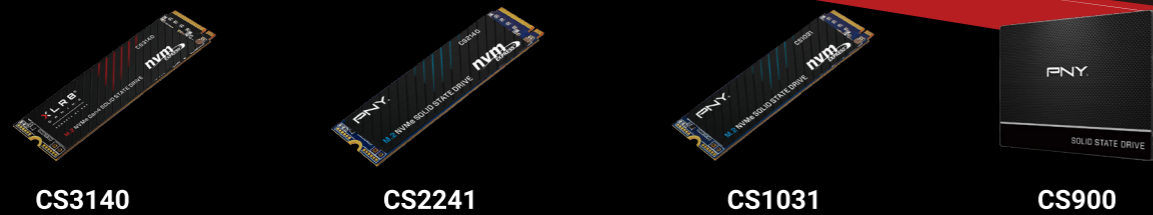

	CS3140	CS2241	CS1031	CS900
Usable Capacities	1TB / 2TB / 4TB / 8TB	500GB / 1TB / 2TB / 4TB	500GB / 1TB / 2TB	120GB-2TB
Interface	PCIe Gen4x4 NVMe 1.4	PCIe Gen4x4 NVMe 1.4	PCIe Gen3x4 NVMe 1.3	SATA-III (6 GB/s)
Form Factor	M.2 2280	M.2 2280	M.2 2280	2.5-inch
Max Sequential Read*	Up to 7,500MB/s*	Up to 5,100MB/s*	Up to 2400MB/s*	Up to 550 MB/s *
Warranty	5-year	5-year	5-year	3-year

*Transfer speed vary with capacity, please visit www.pny.com.tw for more information

Portable SSD



Elite-X Gen 2 Portable SSD

- USB 3.2 Gen 2x2
- Transfer speed up to 1,800 MB/s
- 1TB/ 2TB/4TB

Flash Memory



Elite-X
USB 3.2



Duo Link Type-C
USB 3.2



Turbo Attaché R
USB 3.2



Turbo Attaché 4
USB 3.2



Color Attaché 4



Attaché I



Elite U1

- U1, V10
- 32GB - 256GB




Elite-X

- U3 V30 A1
- 32GB - 256GB



Pro Elite

- U3 V30 A2
- 256GB - 1TB

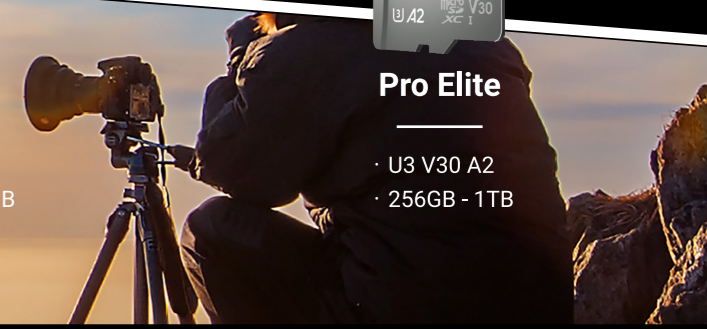

PNY

XLR8®

G A M I N G